

LTB L-Tube

Certification under progress



Affordable LED tube

- Non-flicker
- Glare-free and optimal uniformity
- Light weight (160g)
- Non-metallic heat sink
- Built-in Driver, external driver (*Optional)

Application

Factories, Super stores, Big box chains, Offices, Gyms

Specifications

* Tolerance : ± 5%


Model	Power	* Luminous Efficacy	* Luminous Flux	Color Temperature	CRI	Weight	Input Voltage	Operation Temperature
LTB016 built-in driver	16W	130 lm/W	2,080 lm	5700K (3000K, 4000K 5000K, 6500K available)	80 Ra	0.19 kg / 0.42 lb	AC100~240V	-10°C~40°C 14°F~104°F

Body | Polycarbonate
Cover | Polycarbonate 1T (Diffuser)


Mounting Option | G13 Base
Light Distribution | 130°

Dimensions


• LTB16 (built-in driver)

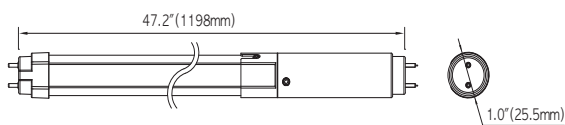

• LTB16 (external driver)

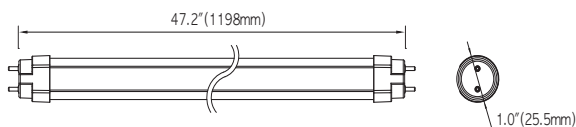

Photometry

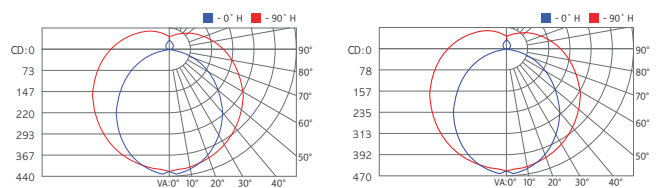

[LTB16(built-in driver) / 5000K / 130°]

[LTB16(external driver) / 5000K / 130°]

